



BAHN


SIDE TOWER ASSEMBLY INSTRUCTIONS

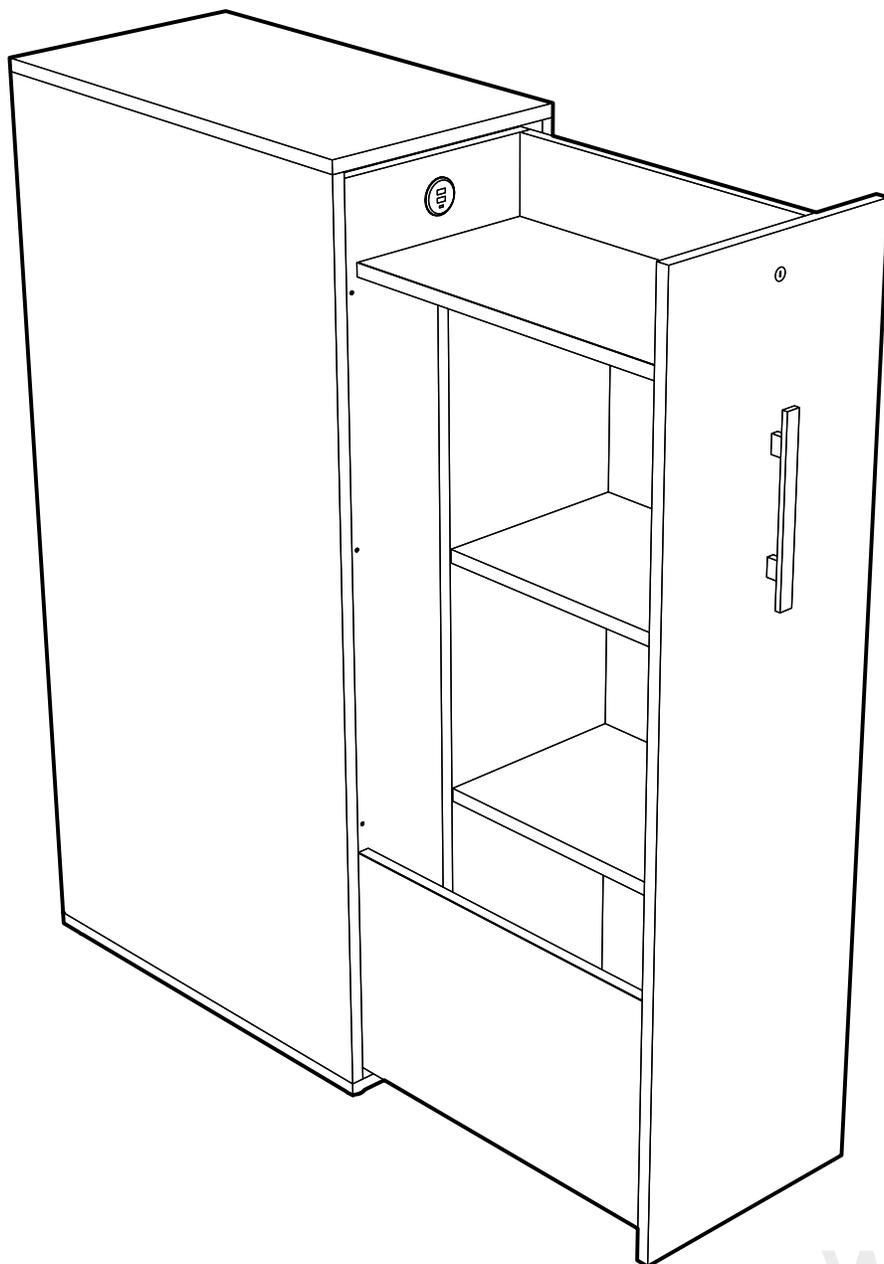

SIDE TOWER TYPICAL

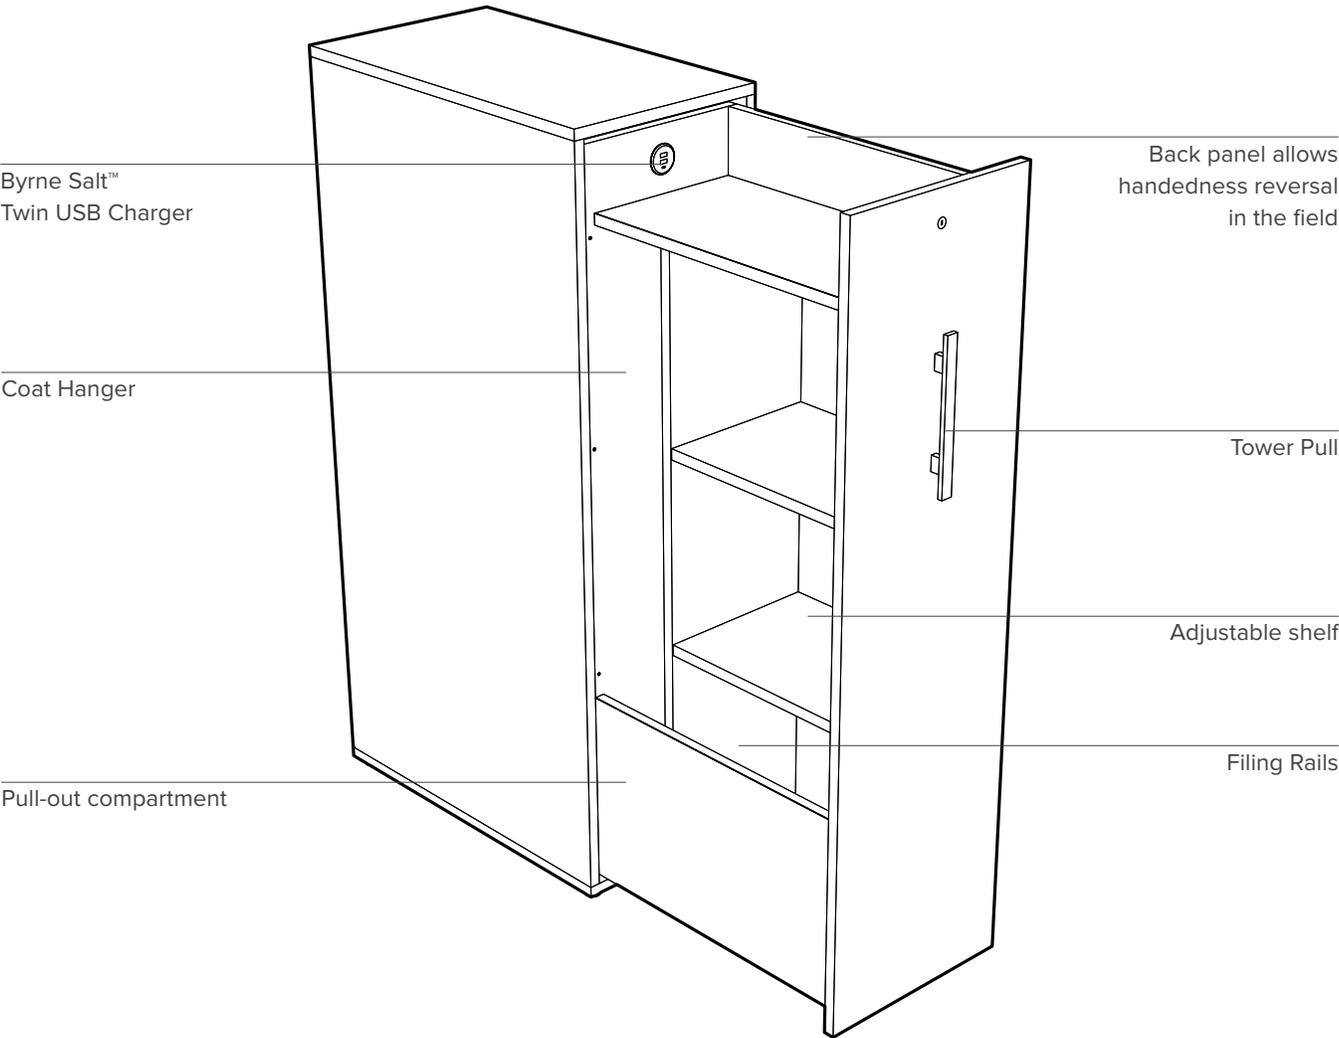

TOOLS





#2 Phillips

1. Plug-In (optional) + Level

Ⓐ If the Tower is equipped with the optional USB plug-in charging unit, plug the 72" cord into a 110V AC receptacle

Note — The pull out unit is equipped with wheels that prevent tipping. Before loading the cabinet, be sure to check the level so the cabinet wheels are in light contact with the floor.

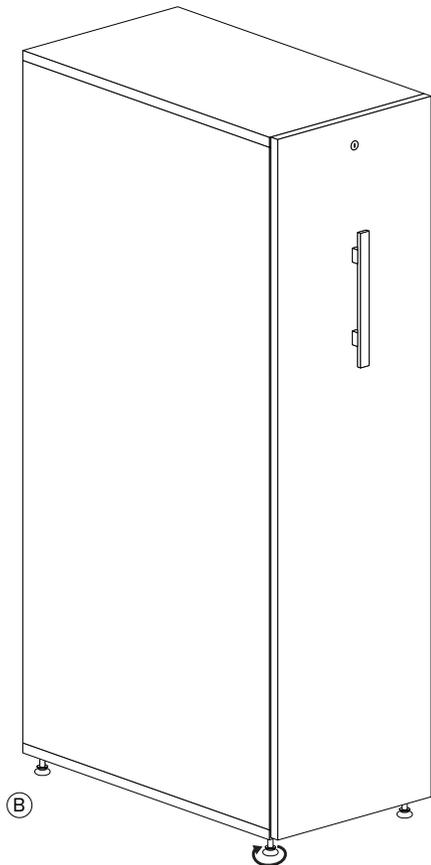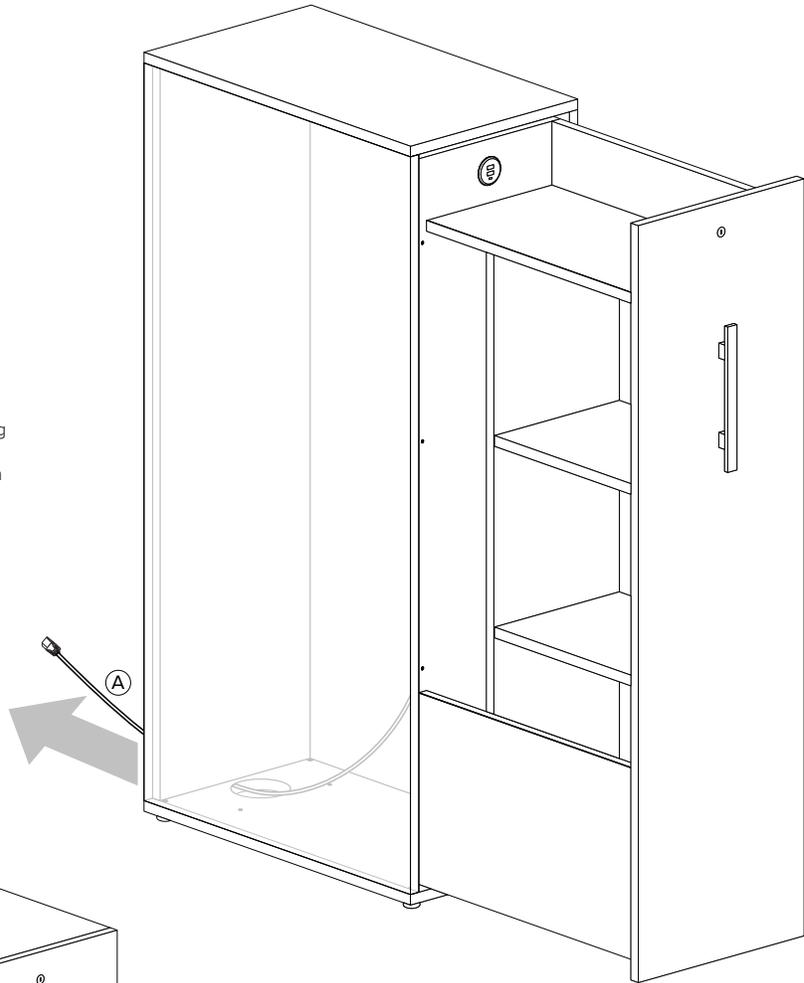

Ⓑ Slide the cabinet in place and level using adjustable glides

2.

Reverse Handedness

Ⓐ Open the pull out unit: With #2 Phillips tip, carefully turn the cam (arrow will point towards adjacent panel) to unlock the pins (x6) on the back panel of the unit

Ⓑ Check to be sure the cams are loose. Then, using two hands, push the panel free. If the panel does not easily disengage, check the cams again. Remove the panel

Ⓒ Swap the pins to the opposite side of the panel.

Ⓓ Angle the panel into the unit. If the panel does not fully push into place, check to be sure the cams are in the “open” position.

Ⓔ Once the panel is seated, lock the cams with a #2 philips head driver to secure.

Note — Cabinets are delivered as specified, right or left. You may change the handedness of the cabinet by repositioning the back panel.



CAUTION — If the panel is not free after all cams are unlocked, check to ensure pins are still fully seated in panels. These can be pushed into place using a flathead screwdriver. Excessive force can damage reversible panel.

